



Tooling solutions for the power utility industry.


CN-258 - SERVICE ENTRANCE CRIMPER 6.6 Ton, .950" Jaw Opening

Huskie's CN-258 is used for service entrance connections up to 4/0, and its bypass cartridge assures all compressions. A two stage rapid advance pumping system and threaded collar save compression strokes and time.

The nest dies are "D3", and can be changed with other Kearney "O" type dies. If you wish to use Burndy "W" type dies, simply slip the "W" type over the "D3" nest die and snap them into the locked position. Huskie carries a wide range of market equivalent dies. Pressure can be checked with Huskie's PG-15 pressure gauge.

Tool comes complete with a carrying case.

CN-258N - DIPPED COMPRESSION HEAD INSULATED TO 1000V

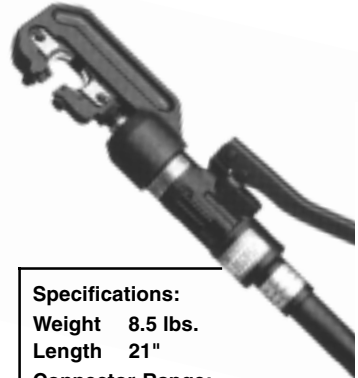

Specifications:

Weight	8.5 lbs.
Length	21"
Connector Range:	
Lugs	#6-500 MCM CU
Splices	#6-4/0 UC/AL
H-taps	4/0 - 4/0

EP-410 AND EP-410T COMPRESSION TOOLS, 12 ton, 1" Jaw Opening

Features:

- * **Two-stage pumping piston for rapid advance**
- * **Replaceable, drop-out bypass cartridge for easy shop repairs**
- * **360° swivel crimping head permits installation in confined areas**
- * **Accepts all U-type dies used in 12 ton tools on today's market**
- * **Magnetic oil reservoir plug to trap metal contaminants**
- * **Twist handle release mechanism**

Consult your connector manufacturer for exact cable, connector, and die combinations. Reliable stocks a variety of dies. Specify the manufacturer's die and connector numbers.

Carrying case included (both models)



Specifications:

Weight	13 lbs. EP-410 11 lbs. EP-410T
Length	23"
Connector Range:	
Lugs	#8-750 MCM
Splices	#10-400 MCM

EP-410T - TITANIUM HEAD - 15% lighter than similar conventional 12 ton tools.

EP-410N - TOOL WITH DIPPED HEAD - Insulated to 1000V

EP-410TN - TITANIUM W/ DIPPED HEAD - Insulated to 1000V

EP-410B - TOOL WITH RUBBER BOOT ON COMPRESSION HEAD

TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193



Tooling solutions for the power utility industry.



Specifications:

Weight 13.5 lbs.

Length 24"

Connector Range:

Lugs Up to 750 MCM

Splices Up to 600 MCM

RELIABLE EQUIPMENT - REL-430 12 TON COMPRESSION TOOL

Designed to crimp splices to 600 MCM and lugs to 750 MCM. Accepts current U-type dies, the 1-3/16" jaw opening allows use on larger cable diameters and connectors than standard 1" opening tools.

180° swivel head permits use in confined areas. Replaceable by-pass cartridge facilitates shop repairs. Two-stage pumping piston for rapid advance, and twist handle release. Magnetic oil reservoir plug traps metal contaminants. Carrying case included.



Specifications:

Weight 16.5 lbs.

Length 25"

Connector Range:

Lugs Up to 750 MCM

Splices Up to 750 MCM

AL and CU

RELIABLE EQUIPMENT - REL-510 12 TON COMPRESSION TOOL

Accepts all U-type dies currently used in existing 12 ton tools. The 1.5" jaw opening accommodates a full range of connectors and lugs to 750 MCM. The 180° swivel head allows use in confined areas. Replaceable, drop-out bypass cartridge for quick, easy shop repairs. Two-stage pumping piston for rapid advance. Magnetic oil reservoir plug traps metal contaminants. Carrying case included.

REL-510N - TOOL WITH DIPPED HEAD
Insulated to 1000V.

REL-510B - TOOL W/ RUBBER BOOT
(on compression head)



Specifications:

Weight 17 lbs.

Length 26"

Connector Range:

Lugs Up to 1033 MCM Strand

Splices 477 ACSR

RELIABLE EQUIPMENT - REL-510K 10.7 TON COMPRESSION TOOL

Accepts Kearney dies used in models WH-2, PH-2, and WH-3 hydraulic tools. The 1.5" jaw opening accepts splices up to 477 ACSR and lugs up to 1033 MCM strand. 180° swivel head permits use in confined areas. Replaceable by-pass cartridge facilitates shop repairs. Two-stage pumping piston for rapid advance, and twist handle release. Magnetic oil reservoir plug traps metal contaminants. Carrying case included.

REL-510KN - TOOL W/ DIPPED HEAD
Insulated to 1000V.

UDK-1 - "U" DIE ADAPTER

TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193



Tooling solutions for the power utility industry.

EP-630 and EP-750 DIELESS CRIMPING TOOLS

The EP-630 and EP-750 were designed to crimp Anderson style connectors - other brand connectors manufactured to ANSI specification C119.4 can be used. The cable must be the maximum size specified for the connector. Consult your connector manufacturer for dieless applications.

Features:

- * **Two-stage pumping piston for rapid advance**
- * **Replaceable, drop-out bypass cartridge for easy shop repairs**
- * **360° swivel crimping head permits installation in confined areas**
- * **Accepts all U-type dies used in 12 ton tools on today's market**
- * **Magnetic oil reservoir plug to trap metal contaminants**
- * **Twist handle release mechanism**

EP-630 - DIELESS CRIMPING TOOL 6.2 ton, .91" Jaw Opening, 1.25" Center

The EP-630 is commonly used by electric utilities and contractors who prefer dieless compression to circumferencial compression. Simply position a connector in the jaws and pumps until the tool bypasses at 6.2 tons of output. Three moveable nibs crimp the connector against a fourth stationary nib. Carrying case included.

EP-630N - TOOL WITH DIPPED HEAD Insulated to 1000V

EP-750 - DIELESS CRIMPING TOOL 6.2 ton, Flip-top, 1.5" Jaw Opening

The EP-750 operates the same as the EP-630, but it has a larger connector/cable capacity. Larger cables can be inserted and easily removed by opening the flip-top head.



EP-630


Specifications:

Weight 11.5 lbs.

Length 22"

Connector Range:

#10 AWG-500 MCM



EP-750

Specifications:

Weight 11.5 lbs.

Length 23"

Connector Range:

#10-750 MCM



**IF YOU DON'T SEE WHAT YOU NEED
CONTACT RELIABLE EQUIPMENT
800-966-3530**

TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193