



Tooling solutions for the power utility industry.




9066-6

9066-6 IMPACT WRENCH

1/2" SQUARE DRIVE WITH BALL DETENT
2,800 IMPACTS PER MINUTE, 200 FT.-LBS. TORQUE

- ˆ Powerful 6.8 AMP MILWAUKEE Motor.
- ˆ Heavy-duty rocker switch forward/rev.
- ˆ Glass reinforced nylon handle and motor housing.
- ˆ Strong, lightweight, textured nylon handle.
- ˆ Heavy-duty aluminum gear case.
- ˆ Easy access to brushes.
- ˆ Double insulated.

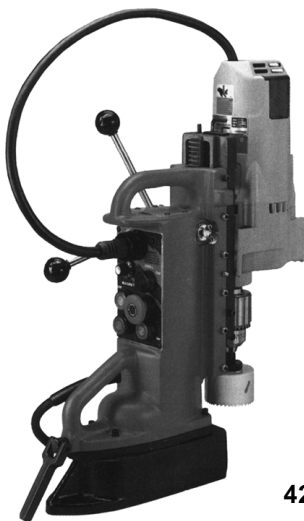

4206-1

4206-1 - ELECTROMAGNETIC DRILL PRESS

4262-1 3/4" MOTOR AND 4203 ADJUSTABLE POSITION, VARIABLE SPEED BASE, 120 VOLT AC ONLY - 12.5 AMPS MAXIMUM RATING

- ˆ Solid state electronic switching with Soft-Start.
- ˆ Feedback speed control.
- ˆ Computer controlled reverse.
- ˆ Full wave holding power.
- ˆ Line Lock-out - Prevents operation if voltage is restored to an interrupted line when switch is locked in the "ON" position.
- ˆ Motor/Magnet interlock.
- ˆ Base/Chip De-Mag.
- ˆ For use on any flat ferrous material 1/2" and thicker.



4206-1

5313-20 - THUNDERMAX™ ROTARY HAMMER

DOUBLE INSULATED 1-1/2" ROTARY HAMMER DEPTH GAUGE, CARRYING CASE, AND SIDE HANDLE

- ˆ Cushioned grips and vibration isolation system.
- ˆ Trigger Speed Control - 0-550 rpm/0-4,100 bpm.
- ˆ 1-1/2" Bit Capacity, 6" Core Bit, 15 Chisel Positions.
- ˆ 8.5 Amp (950 W) Motor - SDS-Max[®] Drive.
- ˆ Quick Change Handle - Side, front, and rear mounting.
- ˆ Stop Rotation Feature - For setting self-drilling anchors.



A B C D E F

| | | |
|-----------------------|------------------|------------|
| A BUSHING TOOLS | 1-1/2" x 12-1/2" | 48-62-4065 |
| B CARBIDE SLOT CHISEL | 1-1/8" x 15" | 48-62-4071 |
| C BULL POINT | 11" | 48-62-4075 |
| | 16" | 48-62-4077 |
| D COLD CHISEL | 1" x 11" | 48-62-4079 |
| | 1" x 16" | 48-62-4081 |
| E SCALING CHISELS | 2" x 12" Angle | 48-62-4083 |
| | 2" x 16" | 48-62-4085 |
| | 3-1/4" x 12" | 48-62-4087 |
| F GROUND ROD DRIVER | 5/8" x 12-1/2" | 48-62-4091 |

TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193