




*Tooling solutions for the power utility industry.*

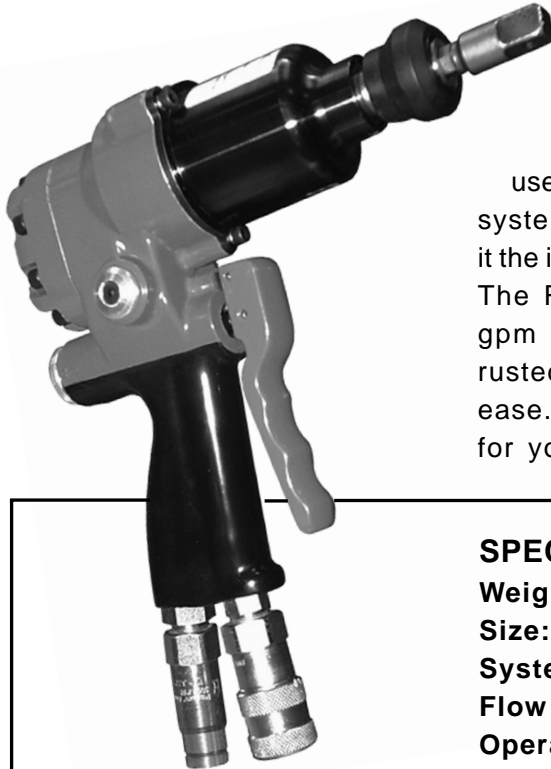

## RELIABLE - REL-425 HYDRAULIC IMPACT WRENCH

The REL-425 hydraulic impact wrench was designed with an E-Z selector for use on both open or closed center hydraulic systems. It's lightweight (just 6.3 lbs.), makes it the ideal tool for use on utility pole construction. The REL-425 delivers 425 ft.-lb. torque at 6 gpm making it great for drilling, loosening rusted hardware or tightening lag bolts with ease. A 7/16" quick change chuck is included for your convenience.

### SPECIFICATIONS:

**Weight:** 6.3 lbs.

**Size:** 8.6" x 8.8" x 2.7"


**System:** Open or Closed Center

**Flow Range:** 4 -12 gpm (optimum 5-8 gpm)

**Operating Pressure:** 1,000-2,000 psi

**Torque:** 425 ft.-lb. @ 6 gpm

**RPM:** 3,600 @ 6 gpm

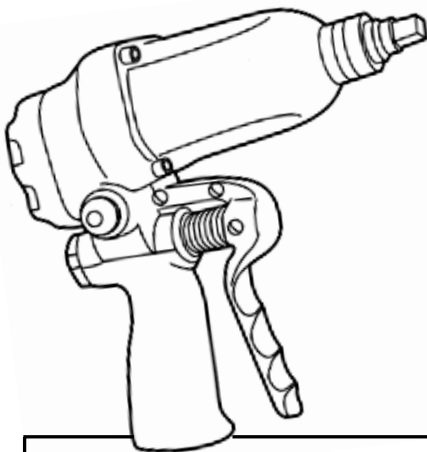

## IMPACT WRENCH & DRILL 1/2" DRIVE

Use to tighten nuts, install lag screws, or as a wood drill.

**Super Spool™** selector control for use on Open- and Closed-Center hydraulic systems.

Reversible. Rugged gear motor.

Needle bearing motor design for long life.

**H6505A** 7/16" hex quick change chuck with 1/2" square adapter.

**H6505A1** 1/2" square drive.

### SPECIFICATIONS:

**Flow Range:** 4-6 gpm

**Operating Pressure:** 1,000-2,000 psi

**Torque:** 280 ft.-lb. at 5 gpm

**Pressure Port Thread:** 9/16-18 SAE O-Ring

**Return Port Thread:** 3/4-16 SAE O-Ring

**RPM:** 1,100 rpm @ 5 gpm (no load)

**Impacts Per Minute:** 2,200 @ 5 gpm

**Weight** 7 lbs.

**Length** 10"

**Width** 3.5"

**Height** 9"

**TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193**



*Tooling solutions for the power utility industry.*

## H8508 - IMPACT WRENCH & DRILL 1/2" DRIVE

Super Spool™ for Open- and Closed-Center operation. Pressure is controlled internally to offer a 4-12 gpm operating range while preventing overspeed damage. Reversible operation.

High torque for drilling salt cured and creosoted poles. Heat insulated handle, ergonomic design adds comfort. Twin hammer impact mechanism for high performance and reliability.

Well balance for comfortable operation.

- H8508/48330** 7/16" hex quick change chuck
- H8508/48329** 1/2" square drive
- H8508/48755** 7/16" hex quick change chuck, adj. torque
- H8508/48760** Square drive, adjustable torque control




SPECIFICATIONS:	
<b>Operating Pressure:</b> 1,000-2,000 psi	<b>Weight</b> 7.1 lbs.
<b>Flow Range:</b> 4-12 gpm	<b>Length</b> 8.2"
<b>Optimum Flow Range:</b> 5-8 gpm	<b>Width</b> 4.2"
<b>Torque:</b> 400 ft.-lb. at 8 gpm	<b>Height</b> 10.6"
<b>Pressure Port Thread:</b> 3/4-16 SAE O-Ring	
<b>Return Port Thread:</b> 3/4-16 SAE O-Ring	

## H8500A - IMPACT WRENCH & DRILL 1/2" DRIVE

Variable torque, 7/16" hex quick change chuck with 1/2" square adapter.

Tighten or loosen nuts, install lag screws, or use as a drill. Variable torque can be adjusted from 80-280 ft.-lbs. Built-in flow control prevents overspeeding, allows flows of up to 12 gpm (45 lpm).

Super Spool™ for Open- and Closed-Center operation. Rugged gear motor. Reversible.

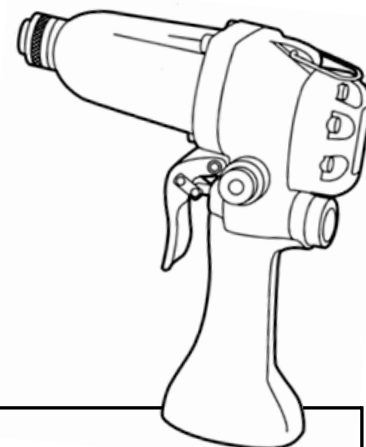

SPECIFICATIONS:	
<b>Operating Pressure:</b> 1,000-2,000 psi	<b>Weight</b> 7.5 lbs.
<b>Flow Range:</b> 5-12 gpm	<b>Length</b> 11"
<b>Torque:</b> 80-280 ft.-lb. at 5 gpm	<b>Width</b> 3"
<b>Pressure Port Thread:</b> 3/4-16 SAE O-Ring	<b>Height</b> 10.75"
<b>Return Port Thread:</b> 3/4-16 SAE O-Ring	
<b>RPM Range:</b> 1-1,200 rpm	
<b>Impacts Per Minute:</b> 2,200 @ 5 gpm	

**TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193**