




POWER UNITS

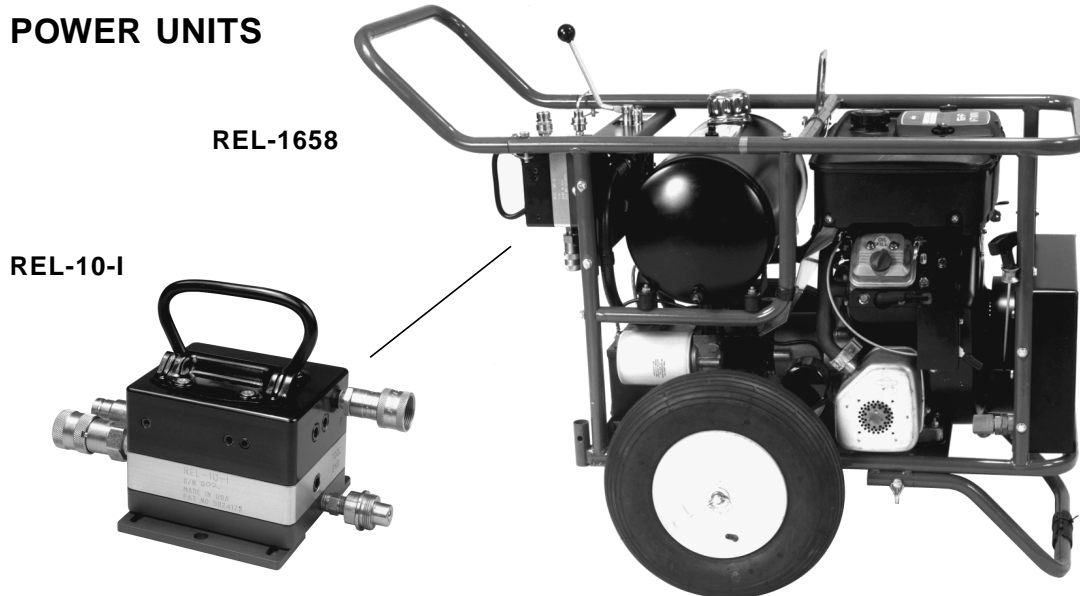

REL-1658 - HYDRAULIC POWER UNIT

The perfect power source for low pressure hydraulic tools. Maximum performance at any power level requirement on all kinds of jobs and in all working conditions.

FEATURES:

- ✓ **Low noise level for greater comfort**
- ✓ **Extremely accessible for maintenance and parts replacement**
- ✓ **Cart mounted with large 16" pneumatic tires**
- ✓ **Strong tubular frame protects the unit on the job and during transport**
- ✓ **Detachable handles and Lifting Hook for convenient storage and transport**
- ✓ **Electric Start - All controls are easily accessible for comfort and safety**
- ✓ **Large 5 Gallon Oil Reservoir**

OPTIONAL - By adding the REL-10-I Intensifier, you may run high pressure tools requiring 4,000-10,000 psi. (As shown in photo)

SPECIFICATIONS: 16 hp Briggs & Stratton Vanguard engine with electric start, System: Open Center; Rated Flow: 5/8 gpm; Relief Pressure: 2,000 psi; Weight: 265 lbs.; Fuel Capacity: 7.2 qt.; Fuel Consumption: 9 gph.

REL-10-I INTENSIFIER (REL-4-I, 4,000 & REL-6-I, 6,000 psi Units Available)

Increase line pressure to a maximum of 10,000 psi. Compatible with all H/P hydraulic equipment. Reliable's Intensifier with only 12 moving parts will provide consistent, smooth operation and simplicity of service.

FEATURES:

- ✓ **High Pressure Quick Disconnects**
- ✓ **Folding handle with 90° Stop (Detachable)**
- ✓ **Adjustable mounting brackets**

SPECIFICATIONS: System: Open-Center, Gear Driven; Oper. Pressure: 800-2,200 psi; Flow Range: 3-8 gpm; Output: Fast Advance 305 in. 3/min.; Output: H/P 30 in. 3/min.; Relief Valve Setting: 4,000 -10,000 psi; H/P Port: 1/4" NPT; Inlet Port: 3/8" NPT; Return Port: 3/8" NPT; Weight: 9.75 lb.; Length: 5.25"; Width 4.25"; Height: 4.50".

TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193



Tooling solutions for the power utility industry.

New from Reliable this Portable Dual-Power Unit features all the options you need to run your low and high pressure hydraulic tools, even where truck access is not available.

This compact unit will save time and money with every use.

The Lightweight, compact design makes this unit a perfect companion for limited access areas.

RELIABLE PORTABLE DUAL-POWER UNIT High & Low Pressure Hydraulic Power Supply



FEATURES

- Pressure ON Valve**
- High/Low Pressure Selector**
- Reliable REL-10-I Intensifier**
- Hydraulic Fluid Reservoir**
- Visual Fluid Level Indicator**
- 8 Inch All-Terrain Wheels**
- Wheel Storage (Skid Mount)**
- H/D Tubular Steel Frame**
- Honda 6.4 hp Engine**
- High Efficiency Oil Cooler**
- Extendable Carry Handle**
- Fuel Tank**
- Lifting Eye**

An optional low pressure unit is also available. Consult your Reliable agent for information.

SPECIFICATIONS

Height:	19.75 inches
Length:	36.50 inches
Width:	21.25 inches
Weight:	85 pounds (dry)

A single pump provides the power needed for high or low pressure tool operation.

The twin pressure design features 1,400 PSI output on the low pressure side, and the REL-10-I intensifier supplies 10,000 PSI for all of your high pressure applications.

A combination of the finest materials and features provide continuous and dependable service under the rigorous demands of the power utility and line construction industry.

Reliable performance from the HONDA, 6.4 HP, gasoline engine.

The high efficiency hydraulic fluid cooler, 1.5 gallon hydraulic fluid reservoir, and Open Center system enhance performance and may reduce service cost and extend tool life.

All in one convenient package.

We have mounted all of these and many more features on a heavy duty tubular frame with 8 inch all terrain wheels.

DIMENSIONS

System Type:	Open Center
Flow Rate:	6 GPM @ 1,400 PSI
Reservoir:	1.5 Gallons
Low Pressure:	1,400 PSI max.
High Pressure:	10,000 PSI max.


This unit is ready to go, ANYWHERE!

TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193



Tooling solutions for the power utility industry.

HG3555A - PORTABLE POWER UNIT - DUAL CIRCUIT

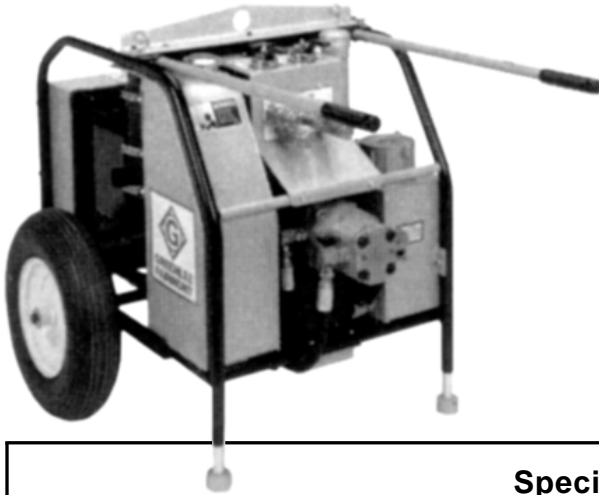

Can be taken quickly to any job site.
 Gasoline Powered.
 Open-Center System.
 Electric Start.
 Tubular frame protects components, providing easy handling.
 Oil Cooler standard.
 16 in. pneumatic wheels.
 On/Off selector valve.
 HTMA type coupler included.

Weight 314 lbs. dry	Specifications:
	Type: Dual circuit, compact, portable
Length 33.5"	Capacities: Gasoline - 4 gal. Hydraulic Oil - 2.8 gal.
	Rated Flow: 2 - 5 gpm circuits or combined 1-10 gpm circuit
Width 32.5"	Relief Pressure: 2,000 psi
	Filtration: 10 Micron, replaceable
Height 30"	Oil Cooler: Standard engine driven fan
	Engine: 20 hp Kohler Magnum
	Pressure Port Thread: 1/2 in. NPTF
	Return Port Thread: 1/2 in. NPTF

49113 - Portable Power Unit

Same as above, Battery Not Included. (for shipment outside North America)

ACCESSORIES FOR POWER UNITS

Part	Description	For Use With	HG3503A	49114	HG3558B	49113
135586	Wheel and handle		x	x		
138448	Automatic Throttle Control		x	x		
158151	16 in. Wheel Kit				x	x
158152	Lifting Eye				x	x



**IF YOU DON'T SEE WHAT YOU NEED
 CONTACT RELIABLE EQUIPMENT
 800-966-3530**

TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193