




Tooling solutions for the power utility industry.

HG3555A - PORTABLE POWER UNIT - DUAL CIRCUIT

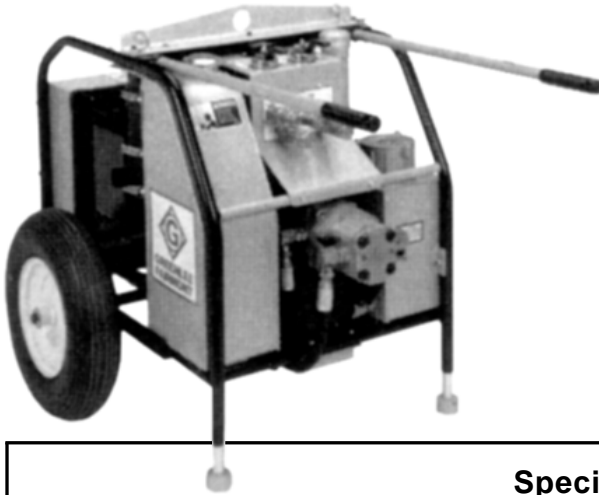

Can be taken quickly to any job site.
 Gasoline Powered.
 Open-Center System.
 Electric Start.
 Tubular frame protects components, providing easy handling.
 Oil Cooler standard.
 16 in. pneumatic wheels.
 On/Off selector valve.
 HTMA type coupler included.

Weight 314 lbs. dry	Specifications:
	Type: Dual circuit, compact, portable
Length 33.5"	Capacities: Gasoline - 4 gal. Hydraulic Oil - 2.8 gal.
	Rated Flow: 2 - 5 gpm circuits or combined 1-10 gpm circuit
Width 32.5"	Relief Pressure: 2,000 psi
	Filtration: 10 Micron, replaceable
Height 30"	Oil Cooler: Standard engine driven fan
	Engine: 20 hp Kohler Magnum
	Pressure Port Thread: 1/2 in. NPTF
	Return Port Thread: 1/2 in. NPTF

49113 - Portable Power Unit

Same as above, Battery Not Included. (for shipment outside North America)

ACCESSORIES FOR POWER UNITS

Part	Description	For Use With	HG3503A	49114	HG3558B	49113
135586	Wheel and handle		x	x		
138448	Automatic Throttle Control		x	x		
158151	16 in. Wheel Kit				x	x
158152	Lifting Eye				x	x



**IF YOU DON'T SEE WHAT YOU NEED
 CONTACT RELIABLE EQUIPMENT
 800-966-3530**

TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193