

RELIABLE EQUIPMENT & SERVICE CO., INC.

REL-58RH

SINGLE ACTING HYDRAULIC CUTTING TOOL



6 TONS OF CUTTING FORCE



REL-58RH - SINGLE ACTING HYDRAULIC CUTTING TOOL

Among the smallest hydraulic cutting tools available. Designed to cut copper, aldre, aluminum, aluminum-steel cables, EHS guy wire and steel ropes having a max overall diameter of 1" and steel ground rod up to 5/8". The blades are manufactured from high strength special steel, heat treated to ensure a long service life.

The head will rotate by 180 degrees. Enabling the operator to work in the most comfortable position, reducing fatigue. The **REL-58RH** positive latch head opens easily to allow fast tool relocation, and simplify the cutting of running cables.


SPECIFICATIONS

Length	6.75 inch
Weight	4.0 lbs.
Pressure	10,000 psi
Wire Ropes	1 inch
Soft Steel Bolts	7/8 inch
Rebar, Ground & Anchor Rod	5/8 inch
Cu. & Al. Wire	1 inch
ACSR	1 inch
Stand. Guy Wire	7/8 inch
Lead Sheathed & Telephone Cable	DO NOT CUT



RELIABLE EQUIPMENT & SERVICE CO., INC.

301 Ivyland Road • Warminster, PA 18974
Phone: 800-966-3530 • Fax: 215-357-9193
Visit us on the web at www.Reliable-Equip.com



RELIABLE EQUIPMENT & SERVICE CO., INC.

HP4707 SERIES

**10,000 PSI HYDRAULIC
CABLE CUTTERS**

HP4707SA



The **HP4707 Series** hydraulic cable cutters are ideal for cutting individual conductors or communication cable.

Either **HP4707** model will cut individual copper or aluminum conductors up to 1,000 MCM, and can even cut ACSR up to 954 MCM with the standard ACSR blade set.

Simplicity, speed, and convenience make the **HP4707SA** cutter the perfect addition to any single-acting tool inventory.

The **HP4707S** offers double-acting operation to eliminate hang-up problems from metal flash, and offers full control of cutting action at all times.

MAXIMUM CONDUCTOR CAPACITY

Copper	1,000 MCM
Aluminum	1,033.5 MCM
Copper Weld	7/8 AWG
Alumoweld	7/8 AWG
ACSR	954 54/7
Comm. Cable	1 in.

SPECIFICATIONS

System	SA or DA	
Capacity (Jaw Opening)	1.25 in.	
Force @ 10,000 psi (690 bar)	17,720 lb.	
Return @ 5,000 psi (345 bar)	4,950 lb.	
Max. Operating Pressure	10,000 psi (690 bar)	
Max. Return Pressure	5,000 psi (345 bar)	
Couplers	S	Direct Connect
	SA	H/P Screw Type
Weight: 8.0 lb.	Length: 15 in.	Width: 4 in.



RELIABLE EQUIPMENT & SERVICE CO., INC.

301 Ivyland Road • Warminster, PA 18974
Phone: 800-966-3530 • Fax: 215-357-9193

Visit us on the web at www.Reliable-Equip.com



RELIABLE EQUIPMENT & SERVICE CO., INC.

Weight: 16.5 lb.
Length: 17.5 in.
Width: 6.5 in.

Head opens for cable insertion along the line.



REL-2000SA

DOUBLE ACTING HYDRAULIC CUTTING TOOL

This guillotine style cutter features up to a 2 inch cutting capacity, 360° rotating head, and a built-in auxiliary handle.

These cutters can be used for cutting cable, wire rope, soft steel bolts, guy strand, ground rods, anchor bolts, and rebar.

The **REL-2000SA**

System	Double-Acting
Capacity (Jaw Opening)	2 inch.
Force @ 10,000 psi (690 bar)	28,048 lb.
Max Operating Pressure	10,000 psi (690 bar)
High Pressure Couplers	Female Screw Type

2000 SERIES - MAXIMUM CONDUCTOR CAPACITY

Soft Copper Jacket	2"
Aluminum Jacket	2"
Lead Sheathed Cable	2"
Communication Cable	2"
ACSR	2"
Wire Rope	1"
Soft Steel Bolts	7/8"
Guy Strand	3/4"
Ground Rod	3/4"
Anchor Bolts	3/4"
Rebar Grade 40	3/4"




92 Steamwhistle Drive • Ivyland, PA 18974
 Phone: 800-966-3530 • Fax: 215-357-9193
 Visit us on the web at www.Reliable-Equip.com



RELIABLE EQUIPMENT & SERVICE CO., INC.

Weight: 16.5 lb.
Length: 17.5 in.
Width: 6.5 in.

Head opens for cable insertion along the line

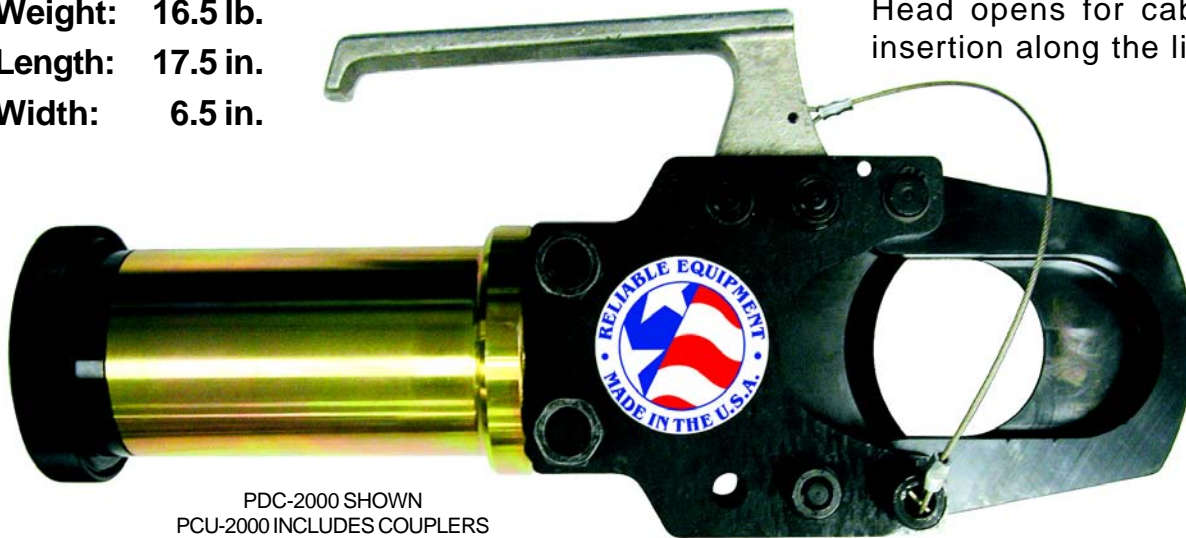

PDC-2000 SHOWN
PCU-2000 INCLUDES COUPLERS

2000 SERIES



DOUBLE ACTING HYDRAULIC CUTTING TOOL

This guillotine style cutter features up to a 2 inch cutting capacity, 360° rotating head, and a built-in auxiliary handle.

These cutters can be used for cutting cable, wire rope, soft steel bolts, guy strand, ground rods, anchor bolts, and rebar.

The PDC-2000 makes a straight, clean cut every time.

2000 SERIES - MAXIMUM CONDUCTOR CAPACITY

System	Double-Acting
Capacity (Jaw Opening)	2 inch.
Force @ 10,000 psi (690 bar)	28,048 lb.
Return @ 5,000 psi (345 bar)	10,445 lb.
Max Operating Pressure	10,000 psi (690 bar)
Max Return Pressure	5,000 psi (345 bar)
Couplers	Direct Connect

Soft Copper Jacket	2"
Aluminum Jacket	2"
Lead Sheathed Cable	2"
Communication Cable	2"
ACSR	2"
Wire Rope	1"
Soft Steel Bolts	7/8"
Guy Strand	3/4"
Ground Rod	3/4"
Anchor Bolts	3/4"
Rebar Grade 40	3/4"



RELIABLE EQUIPMENT & SERVICE CO., INC.

Weight: 21 lb.
Length: 17.5 in.
Width: 7.5 in.

Head opens
for cable insertion
along the line



REL-3000SA

SINGLE ACTING HYDRAULIC CUTTING TOOL



The **REL-3000SA** guillotine-type cutter will make a straight, clean cut every time. These cutters can be used for cutting a wide range of electrical conductors. Head opens easily for inserting cable at any location along line. This Single-acting cutter will compliment existing single acting systems. The 360 ° rotating head eliminates hose twisting and increases operator speed and comfort.

FEATURES

- Lightweight, compact guillotine design provides a clean, positive cut.
- Cutting head is easily opened for cable insertion at any location in line.
- 360° head eliminates hose twisting.
- Built-in Auxiliary Handle

System	Single-Acting
Capacity (Jaw Opening)	3.35 inch.
Force @ 10,000 psi (690 bar)	28,048 lb.
Return @ 5,000 psi (345 bar)	10,445 lb.
Max Operating Pressure	10,000 psi (690 bar)
Max Return Pressure	5,000 psi (345 bar)
Couplers	Direct Connect

3000 SERIES - MAXIMUM CONDUCTOR CAPACITY

Soft Copper Jacket	3"
Aluminum Jacket	3"
Lead Sheathed Cable	3.35"
Communication Cable	3.35"



RELIABLE EQUIPMENT & SERVICE CO., INC.

REL-4000SA

HYDRAULIC 4" CUTTING TOOL



FULL 4 INCH
COPPER AND ALUMINUM
CUTTING CAPACITY

High pressure
female coupler included



REL-4000SA

HYDRAULIC 4 INCH CUTTING TOOL

The **REL-4000SA** single acting hydraulic cutter has been designed to accommodate copper and aluminum conductor up to 4 inches in diameter.

The body and handle have been designed to provide comfort, and to protect the operator from inadvertent contact with the blade or mechanism.

The hardened steel blades will provide a clean cut with minimal distortion.

SPECIFICATIONS

Weight:	17.5 lbs.
Size:	15.6" x 10" x 4"
System	Hydraulic - 10,000 psi max.
Max. Cut	4 inch dia. (Cu. or Al.)
DO NOT CUT STEEL	



RELIABLE EQUIPMENT & SERVICE CO., INC.

301 Ivyland Road • Warminster, PA 18974
Phone: 800-966-3530 • Fax: 215-357-9193
Visit us on the web at www.Reliable-Equip.com