




RELIABLE EQUIPMENT & SERVICE CO., INC.

Weight: 21 lb.
Length: 17.5 in.
Width: 7.5 in.

Head opens
for cable insertion
along the line

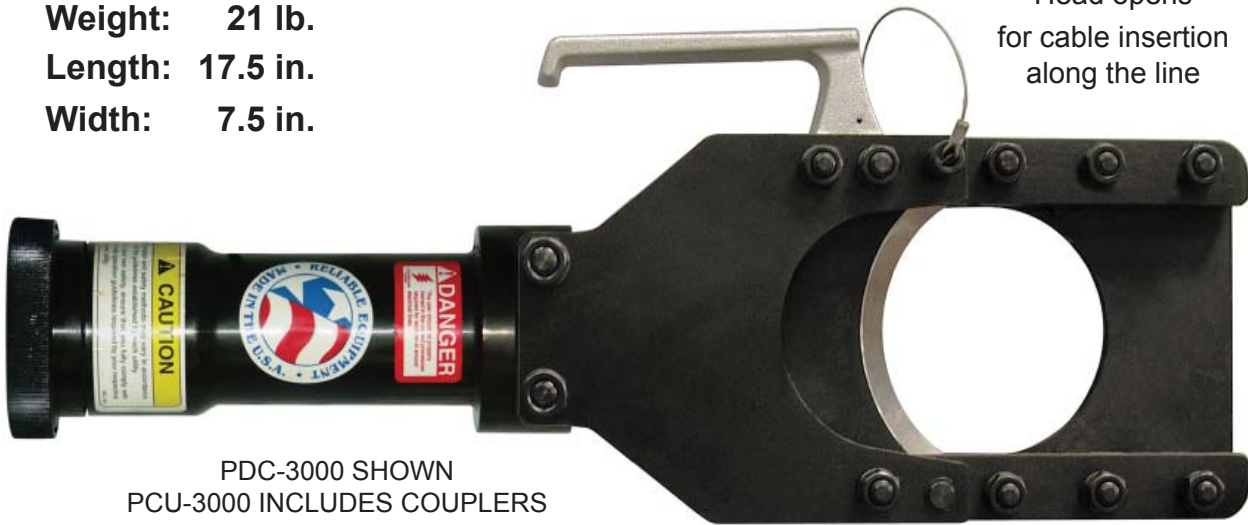

PDC-3000 SHOWN
 PCU-3000 INCLUDES COUPLERS

PDC-3000

DOUBLE ACTING HYDRAULIC CUTTING TOOL



The 3000 Series guillotine-type cutter will make a straight, clean cut every time. These cutters can be used for cutting a wide range of electrical conductors. Head opens easily for inserting cable at any location along line. Double-acting operation eliminates hang-up problems, and offers full control of cutting action. The 360° rotating head eliminates hose twisting and increases operator speed and comfort.

FEATURES

- Lightweight, compact guillotine design provides a clean, positive cut.
- Cutting head is easily opened for cable insertion at any location in line.
- 360° head eliminates hose twisting.
- Built-in Auxiliary Handle

System	Double-Acting
Capacity (Jaw Opening)	3.35 inch.
Force @ 10,000 psi (690 bar)	28,048 lb.
Return @ 5,000 psi (345 bar)	10,445 lb.
Max Operating Pressure	10,000 psi (690 bar)
Max Return Pressure	5,000 psi (345 bar)
Couplers	Direct Connect

3000 SERIES - MAXIMUM CONDUCTOR CAPACITY

Soft Copper Jacket	3"
Aluminum Jacket	3"
Lead Sheathed Cable	3.35"
Communication Cable	3.35"