




RELIABLE EQUIPMENT & SERVICE CO., INC.

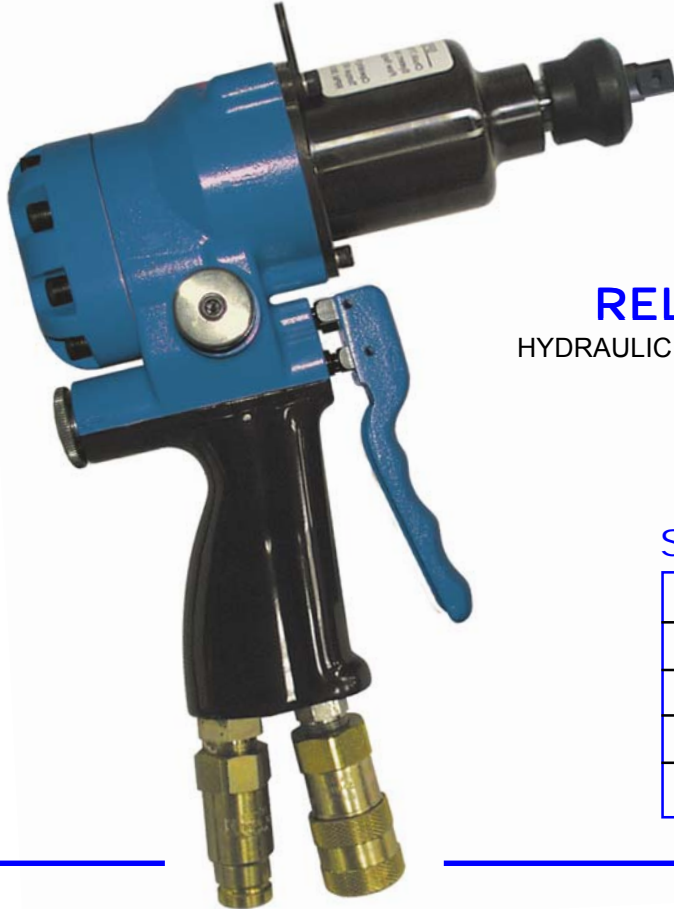

Shown With
Optional WJ-1137-P
7/16" H - 1/2" SQ.

REL-425C
HYDRAULIC IMPACT WRENCH



SPECIFICATIONS

System	Open/Closed Center
	4 -8 gpm (opt. 5-8 gpm)
	1,000-2,000 psi
	425 ft.-lb. @ 6 gpm
	3,600 @ 6 gpm

REL-425C HYDRAULIC IMPACT WRENCH WITH 7/16" QC CHUCK

The **REL-425C** hydraulic impact wrench was designed with an E-Z selector for use on both open or closed center hydraulic systems. It's lightweight (just 6.3 lbs.), makes it the ideal tool for use on utility pole construction.

The REL-425C delivers 425 ft.-lb. torque at 6 gpm making it great for drilling, loosening rusted hardware or tightening lag bolts with ease. A 7/16" quick change chuck is included for your convenience.

Weight: 6.3 lbs., **Size:** 8.6" x 8.8" x 2.7"

REL-IH IMPACT HOLSTER

The REL-IH will protect your impact. Bracket fits up to a 2-1/2" lip. Mount inside or outside of bucket. Side cutout allows quick, easy tool placement and removal with or without a drill bit and chuck.



RELIABLE EQUIPMENT & SERVICE CO., INC.

301 Ivyland Road • Warminster, PA 18974
Phone: 800-966-3530 • Fax: 215-357-9193
Visit us on the web at www.Reliable-Equip.com