

RELIABLE EQUIPMENT & SERVICE CO., INC.



REL-GSB Pole Mounted Cluster Ground Support Bar

Tested to ASTM F855 Grade 5

Continuous Current: 400 Amps
Fault Current - 15 cycles: 43,000 Amps
Fault Current - 30 cycles: 30,000 Amps

Weight: 11 lbs.

REL-GSB


Pole Mounted Ground Cluster Support Bar

Hang grounding sets to facilitate lifting of clamps to the conductors.

Accepts all "C" type and duckbill grounding sets.

Copper support bar is 11" wide by 4-1/4" deep.

A Cluster Bar is specified by OSHA as an approved component of equipotential zone grounding systems.

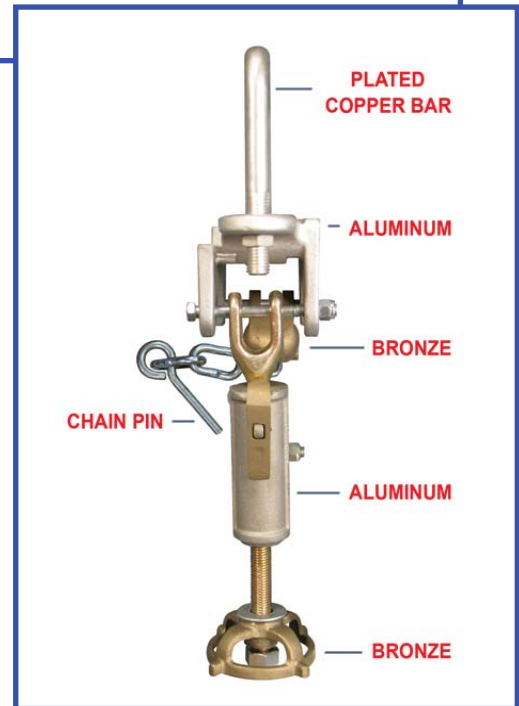


Production Date Stamp




RELIABLE EQUIPMENT & SERVICE CO., INC.

301 Ivyland Road • Warminster, PA 18974
Phone: 800-966-3530 • Fax: 215-357-9193
Visit us on the web at www.Reliable-Equip.com



RELIABLE EQUIPMENT & SERVICE CO., INC.

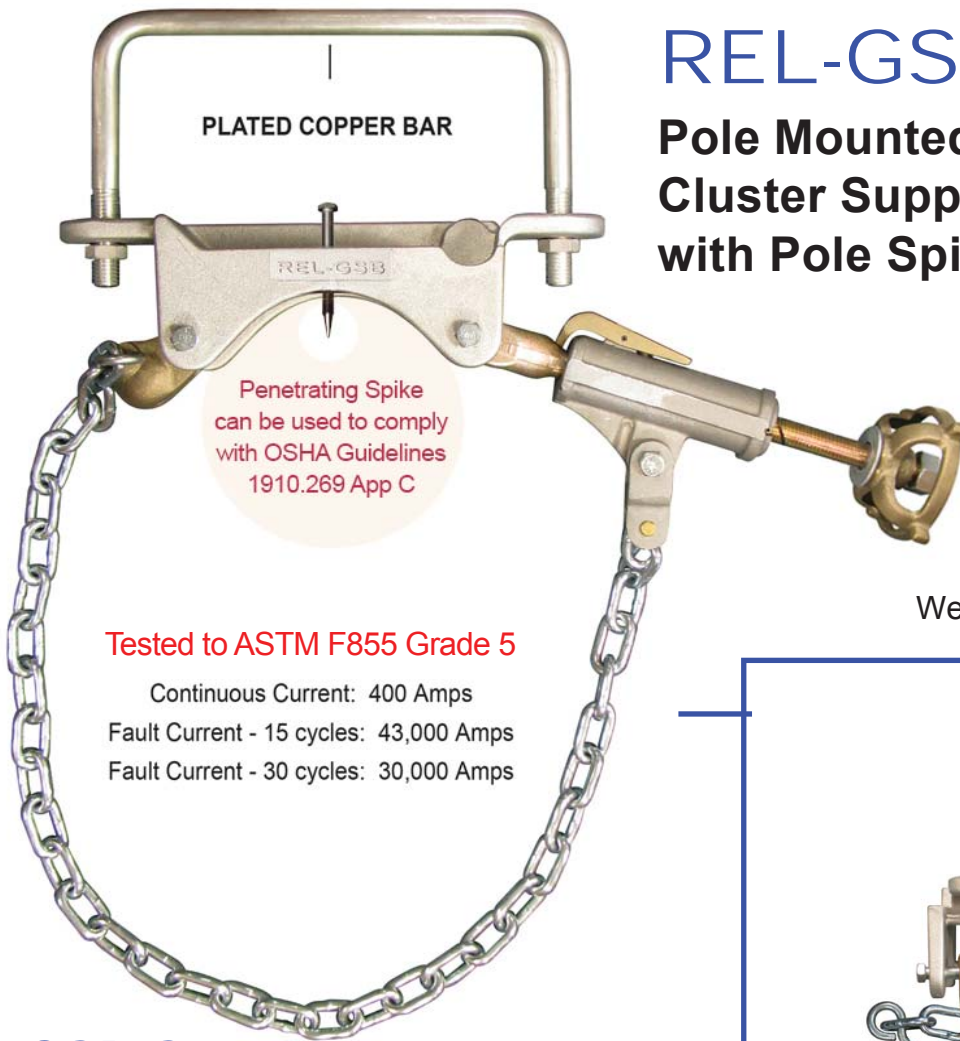


REL-GSB-S Pole Mounted Ground Cluster Support Bar with Pole Spike

Penetrating Spike can be used to comply with OSHA Guidelines 1910.269 App C

Tested to ASTM F855 Grade 5

Continuous Current: 400 Amps
Fault Current - 15 cycles: 43,000 Amps
Fault Current - 30 cycles: 30,000 Amps

Weight: 11 lbs.

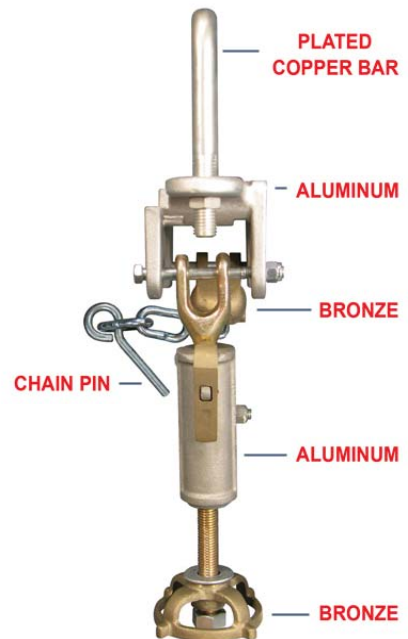

REL-GSB-S

Pole Mounted Ground Cluster Support Bar

Hang grounding sets to facilitate lifting of clamps to the conductors.

Accepts all "C" type and duckbill grounding sets.

Copper support bar is 11" wide by 4-1/4" deep.

A Cluster Bar is specified by OSHA as an approved component of equipotential zone grounding systems.

Production Date Stamp



301 Ivyland Road • Warminster, PA 18974
Phone: 800-966-3530 • Fax: 215-357-9193
Visit us on the web at www.Reliable-Equip.com