



# RELIABLE EQUIPMENT & SERVICE CO., INC.

## REL-SP2

### 2 INCH SUBMERSIBLE HYDRAULIC PUMP

The **REL-SP2** Submersible Pump is a light weight, efficient way to move large quantities of liquids *FAST*.

#### **No priming required!**

The **REL-SP2** is also able to pump petroleum products.

The **REL-SP2** is able to run all day without seal damage.

2" Compact, lightweight Submersible Pump

Operate on Open and closed center systems.

X-Long carry handle aids in placement.

High impact strainer housing.

Whip set and flush-face couplers included.

Can run dry without damage.

#### Specifications

Capacity: Up to 275 GPM

Flow Range: 5-8 GPM

Operating Pressure: 1200-2000 PSI

Intake Port: 1 15/16" (49mm)

Discharge Port: 2" NPFT (51mm)

Height: 14" (over handle)

Width: 8-1/2" x 9-1/2" diameter

Weight: 15 lbs.




**RELIABLE EQUIPMENT & SERVICE CO., INC.**

301 IVYLAND ROAD • WARMINSTER, PA 18974

TOLL FREE: 800-966-3530 • FAX: 215-357-9193

Visit us on the web at [www.Reliable-Equip.com](http://www.Reliable-Equip.com)




# RELIABLE EQUIPMENT & SERVICE CO., INC.

## REL-SP2

### 2 INCH HYDRAULIC SUBMERSIBLE PUMP

The graph below illustrates discharge volume and head with relation to hydraulic flow.

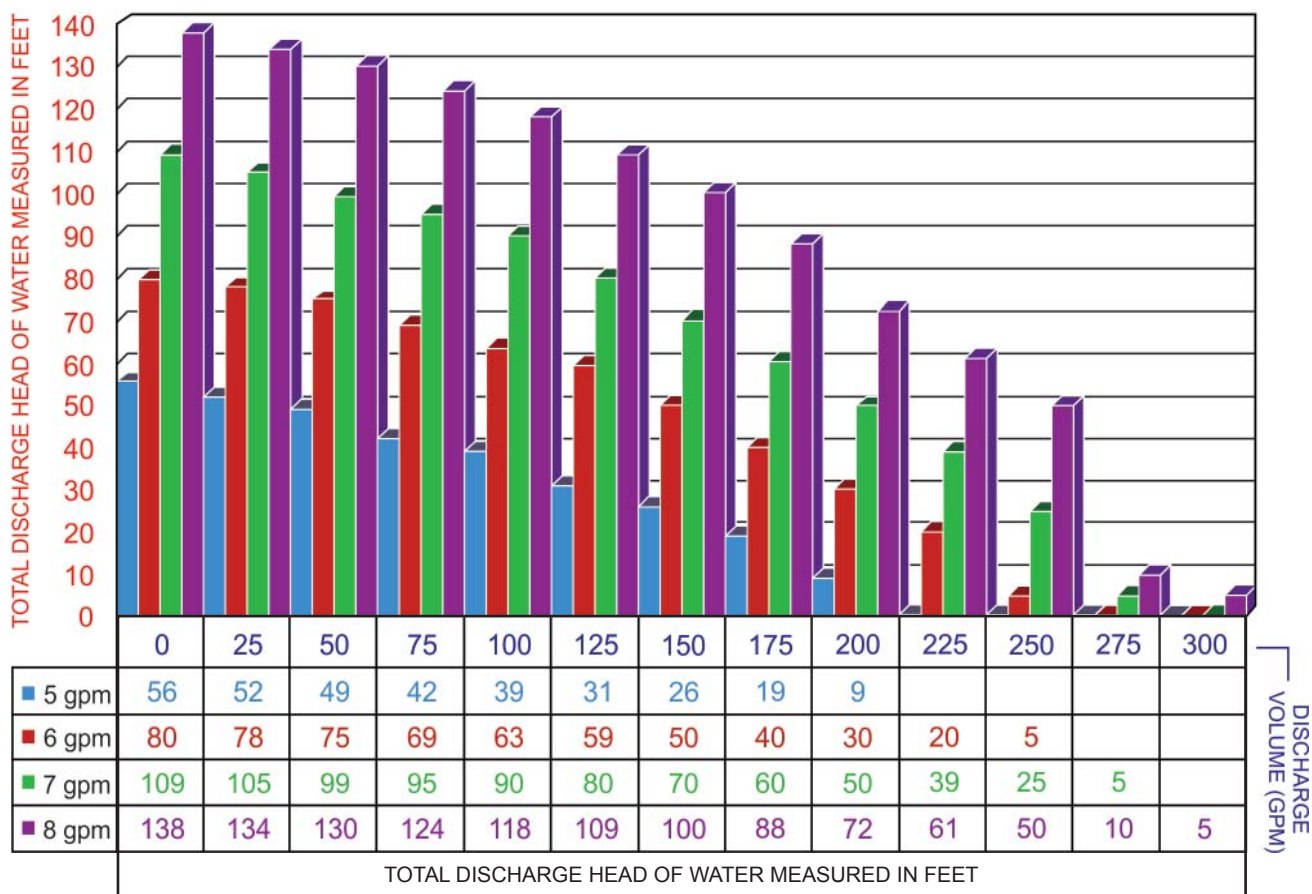

The test above was conducted using a regulated hydraulic source and a fixed discharge assembly.

Results may vary under field conditions.

Contact your **RELIABLE** representative for literature about the **REL-HPU-2000** 2,000 psi hydraulic power unit and the **REL-TP3** 3 inch Hydraulic Trash Pump.



## RELIABLE EQUIPMENT

USED WITH CONFIDENCE AROUND THE WORLD

**RELIABLE EQUIPMENT & SERVICE CO., INC.**  
301 Ivyland Road • Warminster, PA 18974  
Phone: 800-966-3530 • Fax: 215-357-9193  
Visit us on the web at [www.Reliable-Equip.com](http://www.Reliable-Equip.com)



# RELIABLE EQUIPMENT & SERVICE CO., INC.

## REL-SP3-500

### 3 INCH SUBMERSIBLE HYDRAULIC PUMP

The **REL-SP3** Submersible Pump is a light weight, efficient way to move large quantities of liquids *FAST*.

#### **No priming required!**

The **REL-SP3** is also able to pump petroleum products.

The **REL-SP3** is able to run all day without seal damage.

3" Compact, lightweight Submersible Pump  
Operate on Open and Closed Center systems.

X-Long carry handle aids in placement.

High impact strainer housing.

Whip set and flush-face couplers included.

Can run dry without damage.

#### Specifications

Capacity: Up to 500 GPM

Flow Range: 5-8 GPM

Operating Pressure: 1200-2000 PSI

Intake Port: 1 15/16" (49mm)

Discharge Port: 3" NPFT (51mm)

Height: 19" (over handle)

Width: 9-1/2" x 11-1/2" diameter

Weight: 17 lbs.




**RELIABLE EQUIPMENT & SERVICE CO., INC.**

301 IVYLAND ROAD • WARMINSTER, PA 18974

TOLL FREE: 800-966-3530 • FAX: 215-357-9193

Visit us on the web at [www.Reliable-Equip.com](http://www.Reliable-Equip.com)




# RELIABLE EQUIPMENT & SERVICE CO., INC.

## REL-SP3

### 3 INCH HYDRAULIC SUBMERSIBLE PUMP

The graph below illustrates discharge volume and head with relation to hydraulic flow.

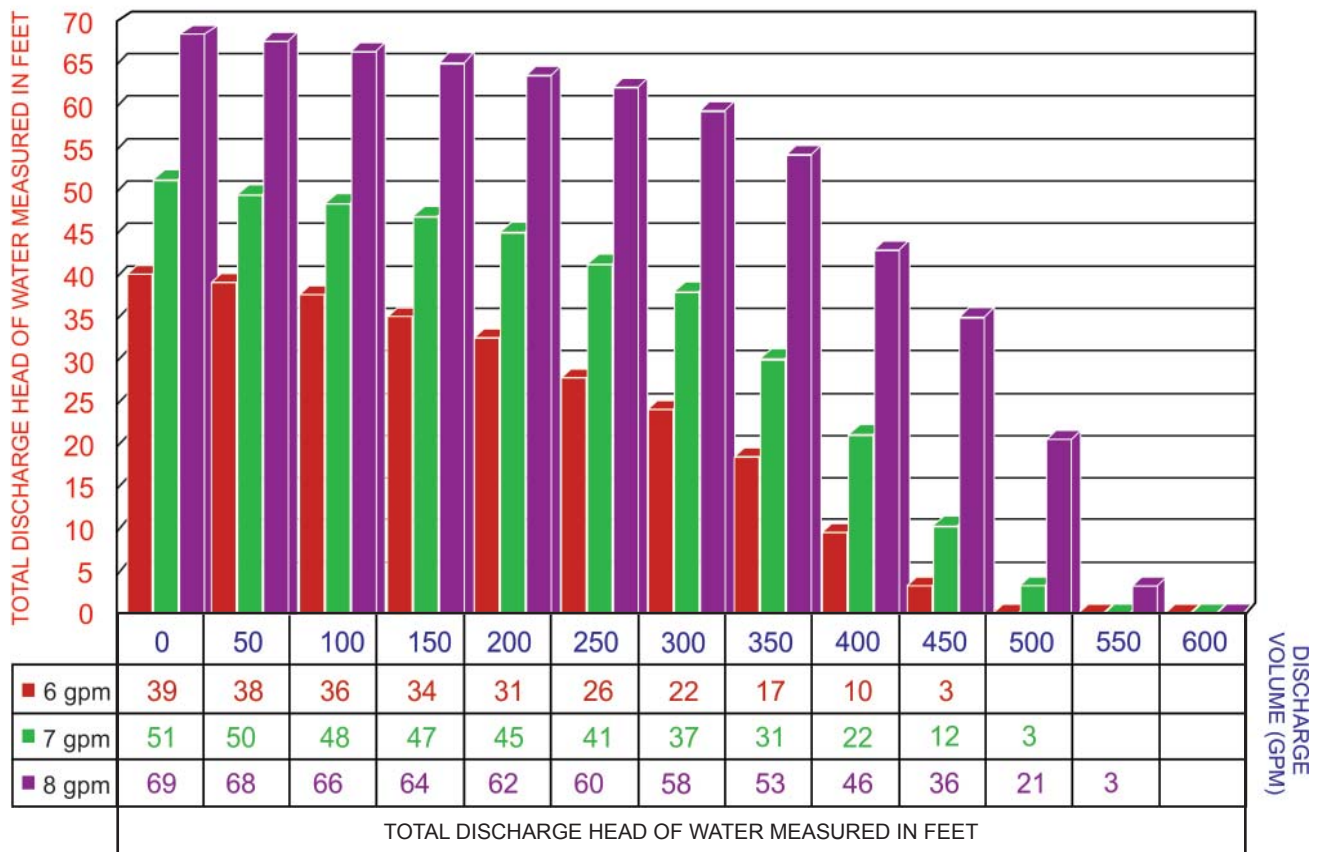

The test above was conducted using a regulated hydraulic source and a fixed discharge assembly.

Results may vary under field conditions.

Contact your **RELIABLE** representative for literature about the **REL-HPU-2000** 2,000 psi hydraulic power unit and the **REL-TP3** 3 inch Hydraulic Trash Pump.



## RELIABLE EQUIPMENT

USED WITH CONFIDENCE AROUND THE WORLD

**RELIABLE EQUIPMENT & SERVICE CO., INC.**

301 Ivyland Road • Warminster, PA 18974

Phone: 800-966-3530 • Fax: 215-357-9193

Visit us on the web: [www.Reliable-Equip.com](http://www.Reliable-Equip.com)