

# REL-TP3

## 3 Inch Hydraulic Trash Pump

The REL-TP3 Submersible Trash Pump is the lightest, most efficient way to move large quantities of liquids with concentrations of solids up to 3 inches in diameter and 30% by volume.

**No priming required!**


These urethane pumps have a history of pumping sand, gravel, concrete, and even mortar slurries without issue. The REL-TP3 is also able to pump petroleum products.

The REL-TP3 is able to run all day without seal damage (450 GPM).

The urethane bowl and impeller are extremely durable and light weight. Hard and sharp materials bounce off instead of abrading the interior surfaces, making this design last longer and perform better than aluminum, iron and even steel pumps.



**EP300 WATER PERFORMANCE**  
(3-INCH DISCHARGE SIZE)

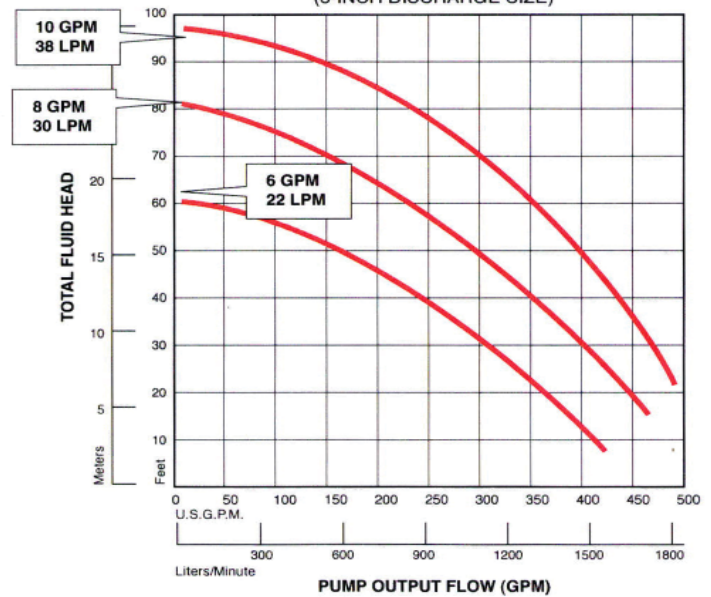

SPECIFICATIONS	
Capacity	450 gpm / 1688 lpm
Weight	30 lbs / 13.6 kg
Height (top of motor)	13 in / 33 cm
Length	14 in / 35.5 cm
Width	16 in / 41 cm
Pressure	1500-2000 psi / 105-140 bar
Flow Range	6-10 gpm / 23-38 lpm
Maximum Flow	10 gpm / 38 lpm
Porting	- 8 SAE
Connect Size and Type	- 8 SAE Male
Discharge Diameter	3 in / 76.2 mm Camlock
Inlet Diameter	3 in / 76.2 mm
System Type	OC, HTMA Type II
HTMA Class II	7-9 gpm @ 2000 psi
EHTMA Category	30 lpm @ 138 bar
Sound Pressure	<85 dBA @ 1 m
Vibration Level	N/A



**RELIABLE EQUIPMENT**

CRAFTED WITH PRIDE IN THE U.S.A.  
USED WITH CONFIDENCE AROUND THE WORLD

301 Ivyland Road • Warminster, PA 18974  
Phone: 800-966-3530 • Fax: 215-357-9193  
Visit us on the web at [www.Reliable-Equip.com](http://www.Reliable-Equip.com)