




# RELIABLE EQUIPMENT & SERVICE CO., INC.

## REL-117ST

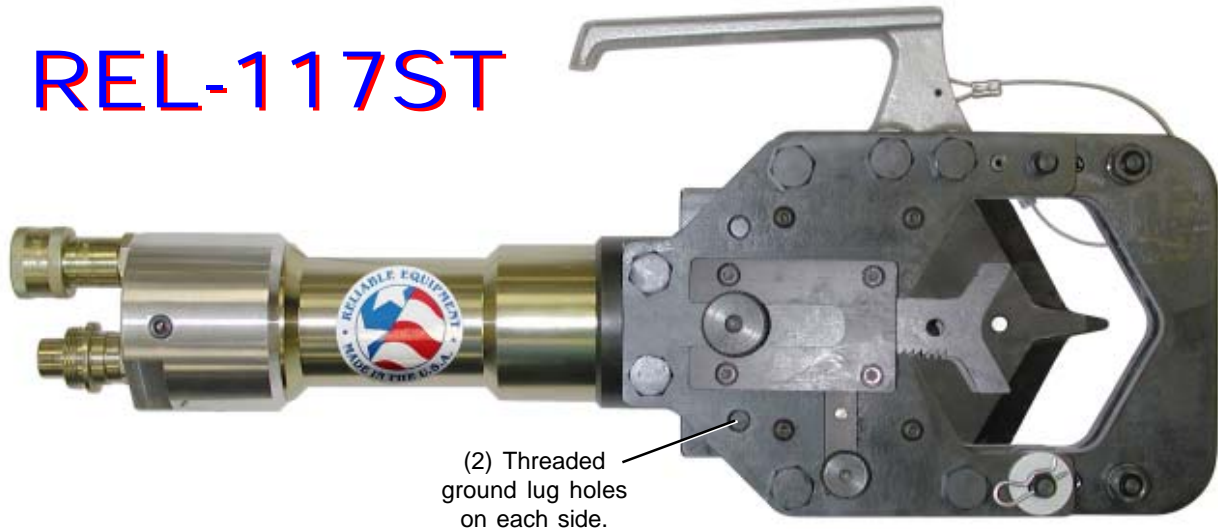

The REL-117 double acting hydraulic spearing tool was designed to drive a piercing blade into the conductor, ensuring that the conductor is out of service, prior to beginning work.


Designed to accommodate electrical cables from 4/0 to 4" O.D. This double acting tool has the ability to advance and retract, eliminating hang-up. A specially designed piercing blade guarantees contact when a multi-bundled conductor is spiked. The REL-117 features a closed head design. Two sliding guide posts adjust to securely hold smaller conductor, ensuring that the spike will be driven accurately into the conductor. An additional oval head is included for conductor from 3" to 4".

### SPECIFICATIONS

<b>Weight</b>	<b>19 lbs.</b>
<b>Dimensions</b>	<b>20"L x 5"W x 3"D</b>
<b>Pressure</b>	<b>10,000 psi</b>
<b>Capacity</b>	<b>4/0 - 3.0" O.D. (Tapered Head)</b>
	<b>3" - 4" O.D. (Oval Head)</b>

### INCLUDES

Piercing blade with 1/2" protruding spike and angled fins.

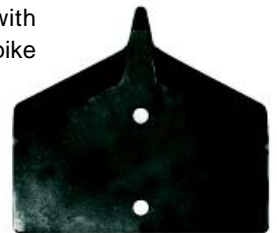

Oval head for conductor from 3" to 4" in dia.



**NOTE:** This tool MUST be used in accordance with the safety guidelines established by your respective utility.