

# RELIABLE EQUIPMENT & SERVICE CO., INC.

REL-5000-WG  
5,000 lbs.




PARALLEL JAW TYPE

SPRING LOADED

## REL-WG Series Wire Pulling Grips


REL-10000-WG  
10,000 lbs.

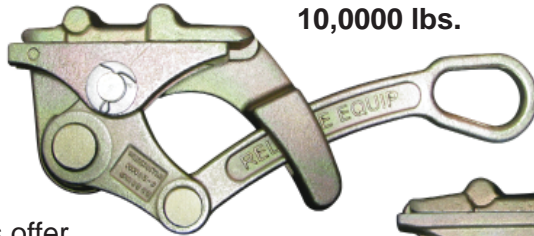

LARGE HANDLE EYE

The **WG SERIES** spring loaded wire grips offer smooth operation and fast action, for positive installation and removal.

REL-12000-WG  
12,000 lbs.

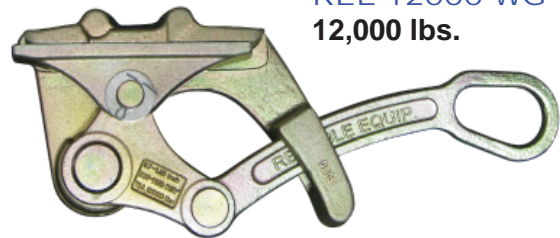

ACCEPTS A WIDER RANGE OF CABLE SIZES THAN SOME COMPARABLE MODELS

**WARNING**

**DO NOT EXCEED RATED CAPACITY.**  
Grips are to be used for installation **ONLY**, **NOT** for permanent anchorage.

### 3 SIZES AVAILABLE!


REL-5000-WG  
Weight: 3.7 lbs.



REL-10000-WG  
Weight: 7.0 lbs.



REL-12000-WG  
Weight: 8.3 lbs.

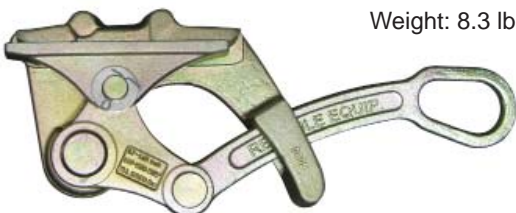

#### REL-5000-WG

Capacity	5,000 lbs.	
Wire Diameter	Min. .18 in.	Max. .6 in.
Gauge	Min. 6 AWG	Max. 4/0 AWG
Handle Eye:	1-1/4 in. X 2 in.	

#### REL-10000-WG


Capacity	10,000 lbs.	
Wire Diameter	Min. .30 in.	Max. .8 in.
Gauge	Min. 1 AWG	Max. 450 MCM
Handle Eye:	1-3/8 in. X 2-1/4 in.	

#### REL-12000-WG

Capacity	12,000 lbs.	
Wire Size	Min. .70 in.	Max. 1.25 in.
Gauge	Min. 397 MCM	Max. 1130 MCM
Handle Eye:	1-3/8 in. X 2-3/8 in.	

RELIABLE EQUIPMENT & SERVICE CO., INC.


301 Ivyland Road • Warminster, PA 18974  
Phone: 800-966-3530 • Fax: 215-357-9193  
Visit us on the web at [www.Reliable-Equip.com](http://www.Reliable-Equip.com)



# RELIABLE EQUIPMENT & SERVICE CO., INC.

## REL-20000-HG

HOT LINE WIRE GRIP  
20,000 lb. (10 TON)

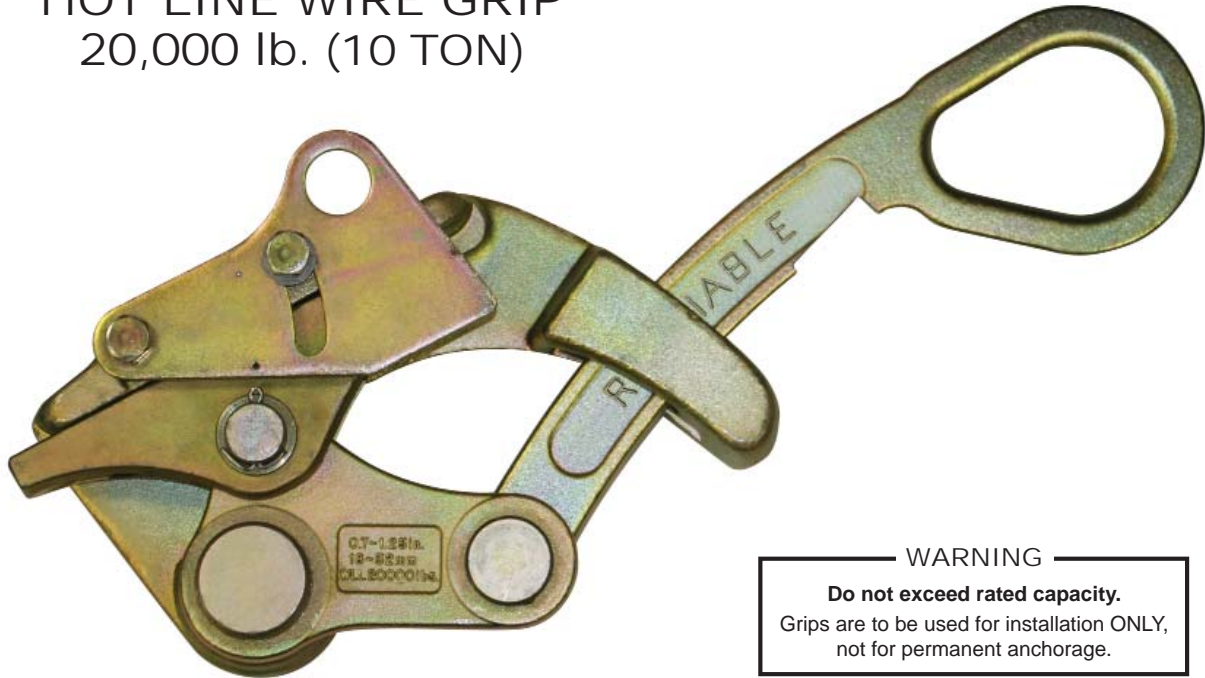

### WARNING

Do not exceed rated capacity.  
Grips are to be used for installation ONLY,  
not for permanent anchorage.

## The REL-20000-HG is the grip you need for your next BIG PULL

Forged steel construction is durable yet light weight (21 lbs.) and features a chromate finish to protect unit from rust and corrosion.

Grips can be opened easily for quick placement and removal from the wire.

Notched handle locks grip open to assist with grip placement.

Rated for a various wire types and sizes from 397 to 1130 MCM reducing field grip changes.

Grips open easily and release instantly to quickly insert or remove wire.

3-1/2" handle eye accepts standard hooks and attaches to tackle blocks easily.

Large 7.5 inch jaw provides extra gripping surface.


<b>Maximum Safe Load:</b>	<b>20,000 lbs.</b>
<b>Minimum Cable Diameter:</b>	<b>.70"</b>
<b>Maximum Cable Diameter:</b>	<b>1.25"</b>
<b>Gripping Surface:</b>	<b>7.5 inches</b>
<b>Weight:</b>	<b>21 lbs.</b>



## RELIABLE EQUIPMENT & SERVICE CO., INC.

301 Ivyland Road • Warminster, PA 18974  
Phone: 800-966-3530 • Fax: 215-357-9193

Visit us on the web at [www.Reliable-Equip.com](http://www.Reliable-Equip.com)



# RELIABLE EQUIPMENT & SERVICE CO., INC.

## REL-20000-WG WIRE PULLING GRIP 20,000 lb. (10 TON)



The **REL-20000-WG** is the grip you need for your next **BIG PULL**

Jaws open smoothly and release instantly for easier insertion or removal of wire.

Manual Cable Gates can be secured to provide an added level of security.

Large handle eye opening accepts standard hooks and easily attaches to tackle blocks.

11.8 inch jaw provides extra gripping surface.

### WARNING

**Do not exceed rated capacity.**

Grips are to be used for temporary installation, not for permanent anchorage.


Minimum Cable Diameter:	1.24" Aluminum
Maximum Cable Diameter:	1.8" Aluminum
Maximum Safe Load:	20,000 lbs.
Gripping Surface:	11.8 inches
Weight:	34 lbs.



## RELIABLE EQUIPMENT & SERVICE CO., INC.

301 Ivyland Road • Warminster, PA 18974  
Phone: 800-966-3530 • Fax: 215-357-9193

Visit us on the web at [www.Reliable-Equip.com](http://www.Reliable-Equip.com)



# RELIABLE EQUIPMENT & SERVICE CO., INC.

## REL-PE

ANCHOR ROD  
PULLING EYE

The sliding wedge grip of the REL-PE pulling eye will provide positive pulling force for your guy wire tensioning applications.

The oversized offset eye will accept the hook of up to a 3 ton hoist while the anchor rod eye remains free for connection of an automatic or preformed type deadend guying devices.

The safety yellow coating provides protection from the elements and extremely high visibility



~~7K 1000X10M 10D~~

working load of 6,000 lbs. and an ultimate breaking strength of 30,000 lbs.

---

**RELIABLE EQUIPMENT & SERVICE CO., INC.**

301 Ivyland Road • Warminster, PA 18974

Phone: 800-966-3530 • Fax: 215-357-9193

Visit us on the web at [www.Reliable-Equip.com](http://www.Reliable-Equip.com)